

C Series Single Channel Pulse Isolator

→ Introductions

This pulse isolator converts the frequency signals to 1:1 frequency signals. DIN rail power supply function can be selected in ordering.

The input, output, and power supply are galvanically isolated from each other. The main advantages of the isolated safety barrier are fast response, low dissipation and temperature stability.

→ Parameters

Power supply:

Connection type: Terminals (9+, 10-) or DIN rail connector

Rated voltage: 18 V DC ~ 60 V DC (Recommended voltage: 24 V DC)

Input (1, 2):

Input signal: frequency

Switching point:

Low level: 0 ~ 2 V; High level: 4 ~ 30 V (The other point need to be ordered)

Frequency range: ≤ 100 kHz

Pulse width: ≥ 5 μs

Input resistance: ≥ 10 kΩ

Resolution:

Input frequency < 1 kHz: 0.1 Hz

Input frequency ≥ 1 kHz: 1 Hz

Output (5, 6; 7, 8): open collector/emitter follower/logic level

Open collector:

high level: $V_{CC} (\leq 30 \text{ V})$

low level: ≤ 2 V

drive current: ≤ 10 mA

Emitter follower:

high level: $V_{CC} - 2 \text{ V}$

low level: ≤ 0.5 V

drive current: ≤ 10 mA

Logic level:

24 V system: PLC, DCS:

high level: $18 \text{ V} \leq V_H \leq 24 \text{ V}$

low level: $V_L \leq 2 \text{ V}$

12 V system: PLC, DCS:

high level: $9 \text{ V} \leq V_H \leq 12 \text{ V}$

low level: $V_L \leq 2 \text{ V}$

Load resistance:

≥ 2 kΩ (24 V system: PLC, DCS)

≥ 1 kΩ (12 V system: PLC, DCS)

Note: Configurable logic level default, open collector or emitter follower can be selected in ordering.

Distribution (Default: 24 V DC):

24 V DC: Distribution voltage ≥ 22V at 20mA

12 V DC: Distribution voltage ≥ 11 V at 20mA

Transmission characteristics:

Accuracy: ± 0.1% F.S. (25 °C ± 2 °C)

Response time: ≤ 0.5 μs

Electromagnetic compatibility: Accordance to IEC 61326-3-1

Dielectric strength (1 mA leakage current, 1 minute test time):

≥ 1500 V AC (Input /Output/Power supply)

Insulation resistance: ≥ 100 MΩ (Input /Output/Power supply)

Ambient conditions:

Operation temperature: -20 °C ~ +60 °C

Relative humidity: 10% RH ~ 90% RH (40 °C)

Atmosphere pressure: 80 kPa ~ 106 kPa


Storage temperature: -40 °C ~ +80 °C

Power dissipation:

0.9 W (24 V DC, single output)

1.8 W (24 V DC, double output)

→ Support model type

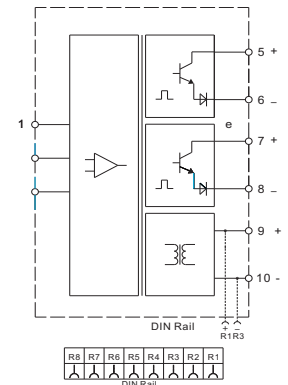


Nanjing New Power Electric Co., Ltd.

safety standards and guidelines.

→ Supplementary instructions

- Our company reserves the right to change the product information without prior notification to the user. If the contents of the description are different from website or sample, this description shall prevail.



B. Snap metal lock onto mounting rail, then rotate the apparatus, as figure B, press down the apparatus onto mounting rail, make sure that the BUS connector pins of apparatus and BUS socket are in close contact.

BUS	Electrical Characteristics
Current	Max. 8 A
Voltage (UL/IEC)	1.6 kV
Operation temperature	-40 °C ~ +105 °C

C. Pry the metal lock off the rail with screwdriver as arrow shown, pull downward the springs, and rotate the apparatus.

- D. Remove the apparatus as arrow shows.
- As far as possible to mount it vertically, In order to dissipation the heat of the apparatus.

Vertically installation

→ Light indication

- PWR: Power indicator light shows green, it means work normally.

→ Attention

- The devices degree of protection is IP 20 and must be protected from undesirable ambient conditions (waterproofing, small foreign objects). It is suitable for installation in the control room or high density field cabinet, DIN 35 mm installation is convenient for installation and displacement.
- The devices were designed for use in pollution degree 2 and overvoltage category III as per IEC/EN 60664-1. If used in areas with higher pollution degree, the devices need to be protected accordingly.
- Installation position shall not be affected by strong mechanical vibration; impact and electromagnetic induction from signal terminal and power supply, should conformity with the requirements on electromagnetic interference resistance of products in Class 3 industrial field atmosphere stipulated in IEC 61000-4; the atmosphere shall be free from gases that are corrosive to metal and plastic components.
- The apparatus must be installed, connected and adjusted by qualified personnel in non-hazardous area according with the instruction manual.
- The operator must strictly comply with the relevant local