



PLC DC S




24 20% DC
220 20% AC 50H / 60H
< 5
4 20 A 1 5
4 20 A
100 --
4 20 A
4 20 A
4 20 A L --
30A/250 AC
3A/275 AC 3A/30 DC
2 LED
/
LED
0.2%F. S
LED S FB
0.0 9999 1000 1
IEC 61326-1
--- A / /
-- M / /
-10% +60%
-30% +70%




NPDP -								
D								
Q						4 20 A		
1								
2						/		
						F M		
1						F M		
						F		
						K		
						220 AC		
						D		
						24 DC		
						0 16Q 8Q 94		
						1 8Q 16Q 94		
						2 9Q 9Q 130		
						3 9Q 4Q 110		
						4 4Q 9Q 110		
						5 72 72 102		


- - 16Q 8Q 94 8Q 16Q 94

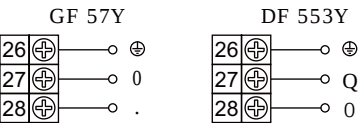

- - 96 96 130

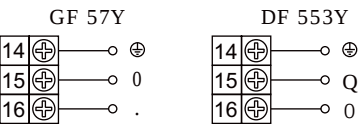


96 48 110 48 96 110

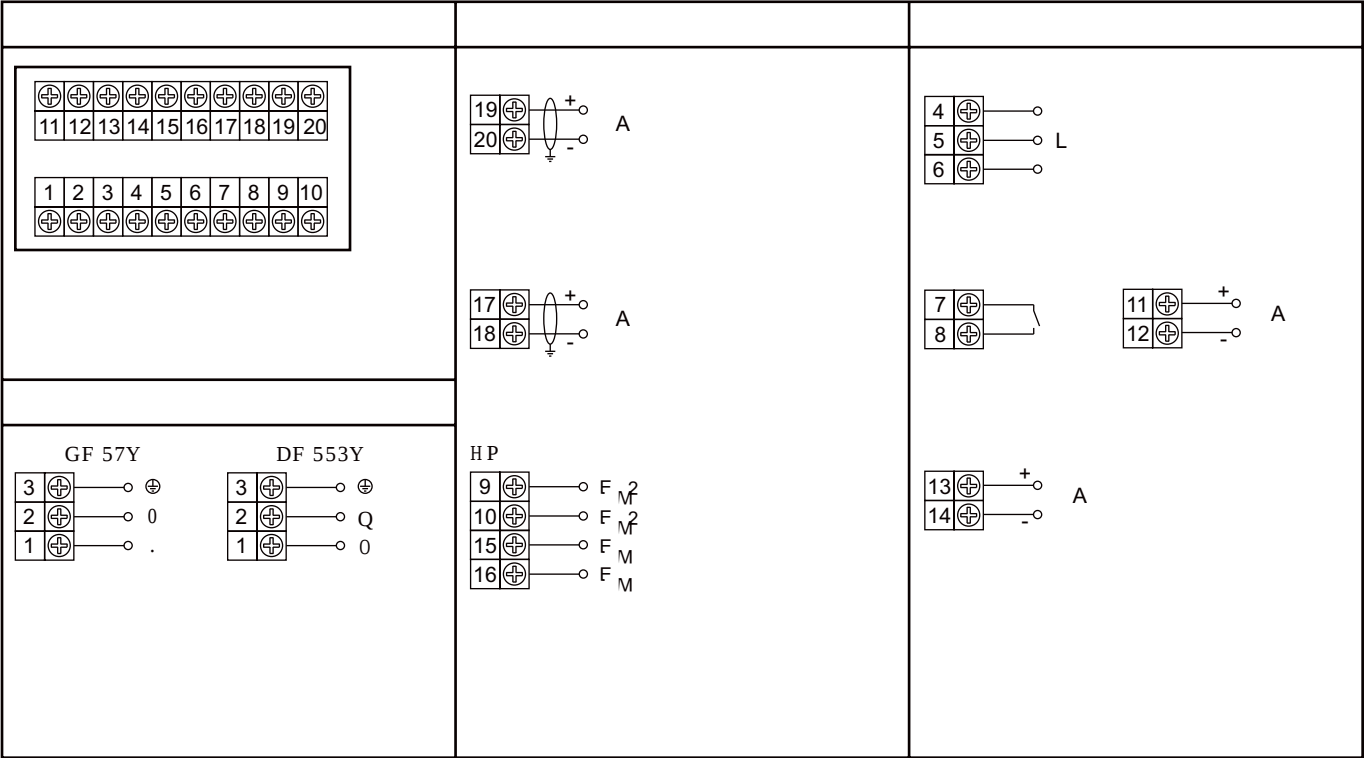

1 F_M F_M 15 F_M² 9 6 F_M 16 10
2 L (5) 4 6

72 72 102

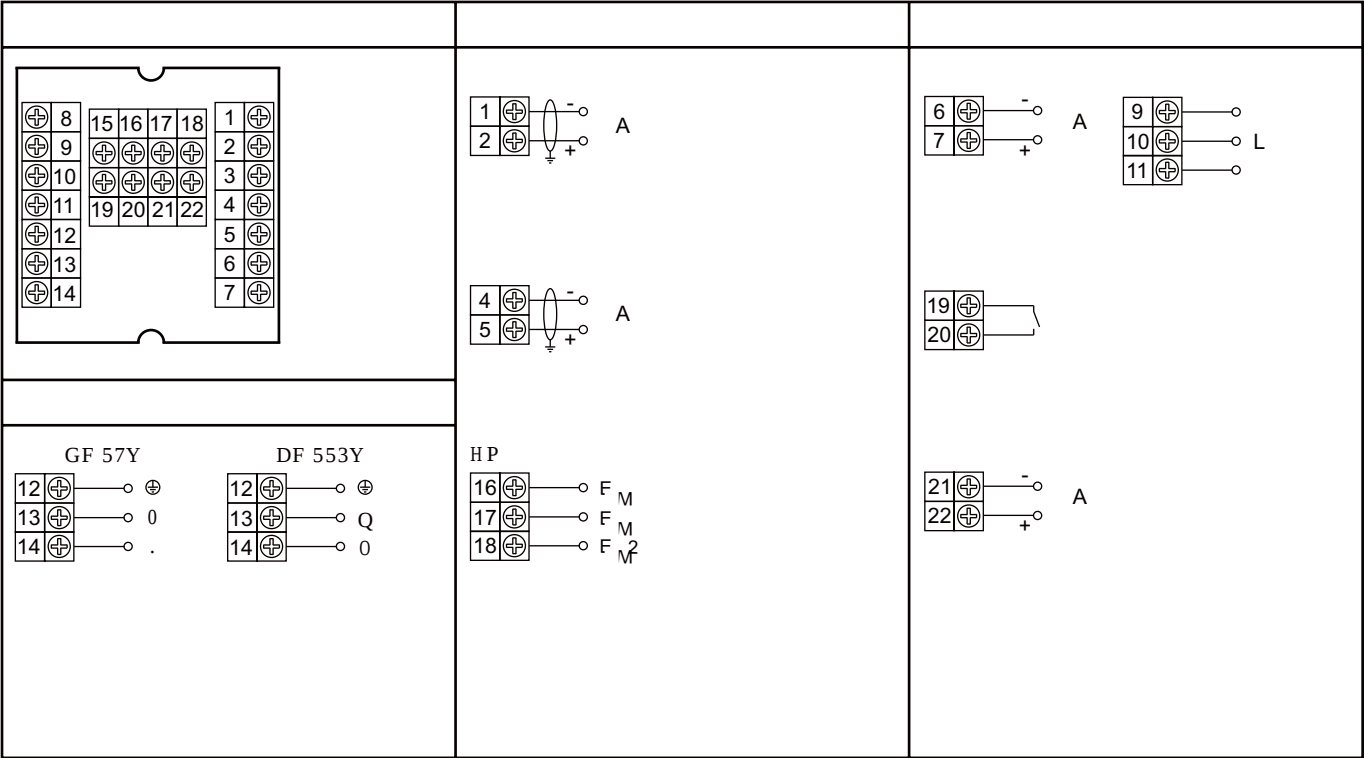

1 F_M 16 F_M² 18 9 F_M 17
2 L (10) 11