

→ 简介

→ 技术参数



Nanjing New Power Electric Co., Ltd.

18V DC~32V DC (24V DC)
85V AC~265V AC (120V DC~360V DC)
(2 5):
0~60V AC; 0~110V AC; 0~220V AC
0~380V AC; 0~600V AC; 0~1000V AC
(7 8 9):
4mA~20mA
0(4)mA~20mA; 0mA~10mA
1~5V; 0~5V; 0~10V
:
 $R_L \leq [(U-3)/0.022]\Omega$; U
0(4)mA~20mA $\leq 550\Omega$; 0mA~10mA $\leq 1.1k\Omega$
0(1)~5V $\geq 1M\Omega$; 0~10V $\geq 2M\Omega$
: 0.2%F.S. (0~110%)
: < 5mV_{rms} (250 Ω)
: 0.01%F.S./°C
: < 500ms
: 2
: EMC IEC 61326-3-1
(漏电流1mA 测试时间1分钟):
 $\geq 1500V AC$ (/ /)
:
-20°C~+60°C
10%RH~90%RH (40°C)
80kPa~106kPa
-40°C~+80°C
:
24V DC供电 < 1W
220V AC供电 < 2W


NPDL- C101 X X 0 X 1

- 1 24V DC
- 2 220V AC
- 2
- 1

代码	含义
1	0V~60V AC
2	0V~110V AC
3	0V~220V AC
4	0V~380V AC
5	0V~600V AC
6	0V~1000V AC
7	

代码	含义
1	4mA~20mA
2	1V~5V
3	0mA~10mA
4	0V~5V
5	0V~10V
6	0mA~20mA
7	

220V AC

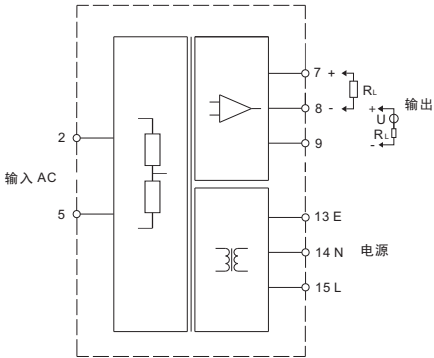


- 110%(0mA~20mA
- 0mA 22mA)

→ 外形结构


× × : 17.8mm×110mm×117mm

24V DC

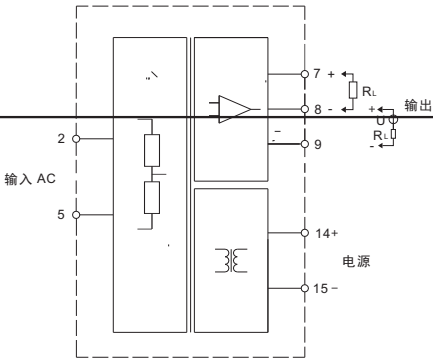

→ 安装

DIN IEC 60715 35mm



A

DIN

- ☐
- 补充说明
- ☐

→ 面板显示

- ☐ PWR ()
- ☐ ALM ()

→ 注意事项

- ☐
- ☐
- ☐
- ☐
- ☐
- ☐

- ☐ IEC/EN 60664-1 2

- ☐ IEC 61000-4

B

C

- ☐
- ☐