

C|βR
N/mAu5mAVp̄iO u5SØVh

: 12 V D C ~ 30 V D C

Qe (1ŷ 2) :

0 ~ 1 A ; 0 ~ 2.5 A ; 0 ~ 5 A ; 0 ~ 10 A

Qv[QeO/ÆS‡{W S° ŷz W(¢ 'eǎn[ŷ æNŒT'h {~

Qe ;b : ~fN: ö

Qœ (7ŷ 8) : 4 m A ~ 20 m A

}ŷR : R_L U - 12) / 0.02] © ; UN:Vp̄iO u5u5S

O |ŷf : 0.2 % F. S. (-25)

~ŷ" Vö: 0 ~ 120 % h yð Qe

n)^fo yß : 0.02 % F. S. /!

s T^ˆ : 40 H z ~ 400 H z

T^ˆ eöô: ŷ 330 m s

` } ŷR : 2P h yðP<

u5x`Q|_u: E M C{&T I E C 61326-3-1

N,u5_ˆf (o u5mA 1 m AŷmK Æöô1R) :

"e 1500 V A C (Qe / Qœ)


sflX gaNö:

sflX n)^fŷ" 20! ~ +60!

v|ø n ^fŷ 10 % R H ~ 90 % R H (40!)

Y'! S R ŷ 80 k P a ~ 106 k P a

P a — n)^fŷ" 40! ~ +80!

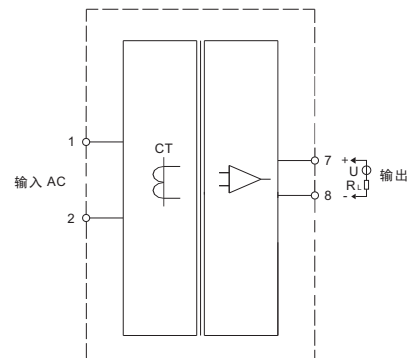

Nanjing New Power Electric Co., Ltd.

W vq̄ ¬y:a Vp

Ł bg f>y:

m P W Rÿu5n c y:po (~ÿr)ÿNŒ h_ u5eö Nfi0

B&W R

[illegible]