

→ 简介
K

■ (EN 574 Type III C)
■
■ 0.5s
■
■

S11 S32 S33 S21
NPFSR-K3

3NO+1NC 2NO+2NC
AgSnO₂+0.2μmAu
AC-15 5A/230V DC-13 5A/24V
10A gL/gG(NO) 6A gL/gG(NC)


数
≤30ms
≤15ms
≤250ms
≤500ms
20ms

境 数
IEC/EN 60947 IEC 61326-3-1
IEC/EN 61000-6-2 IEC/EN 61000-6-4
250 V AC
6000V (1.2/50μs)
1500 V AC 1min
IEC 60947-1
10Hz~55Hz 0.35mm
III

→ 外形结构
NPFSR-K322D
× × : 23mm×100mm×115mm

Nanjing New Power Electric Co., Ltd.


→ 应用示例

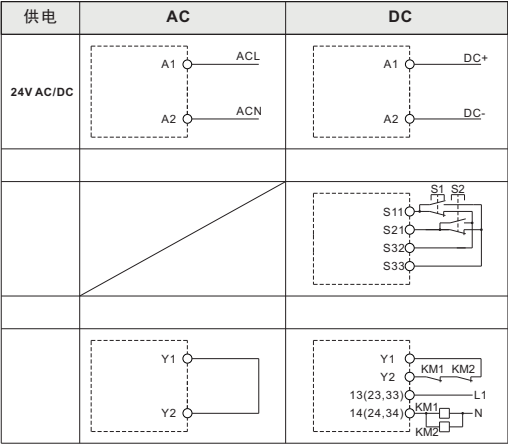

说明

- S1/S2 EN574 type IIIC
- KM1/KM2 IEC 60947

→ 功能描述

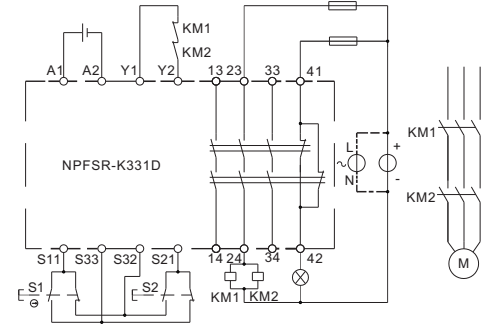

- “ PWR ”
- 0.5s S1 S2
- S1 S2


→ 安装

- DIN IEC 60715 35mm


-

A.


DIN

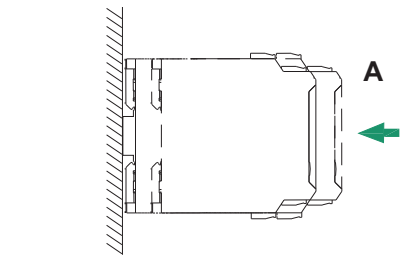


B.



C.



○

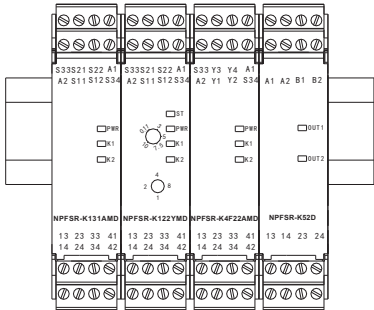

→ 面板显示

- PWR: ()
- K1: K1 () K1
- K2: K2 () K2

→ 注意事项

- IP20 ()

- IEC 60664-1 2

- IEC 61000-4

-

-

→ 补充说明

-