
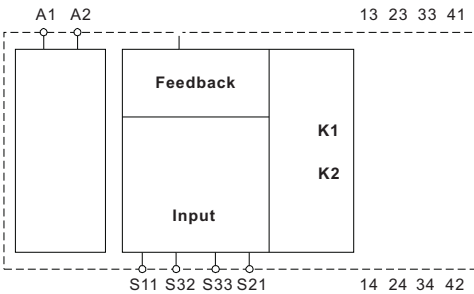


K	→ 简介		Ie = 1A 1 NO 7000000	
	K		B _{10d} 50%	
			→ 适用型号	
	■ (EN 574 Type III C)			
K	■ 0.5s		→ 功能框图	
	■ -			
	→ 技术参数		NPFSR-K322D	
			→ 外形结构	
			× × : 23mm×100mm×115mm	
	24V AC/DC			
	0.85~1.1			
	50Hz~60Hz			
	≤1.5 W/24V DC ≤4.8 VA/24V AC			
	≤50mA/24V DC			
	≤15Ω			
	(EN 574 Type III C)			
	3NO+1NC 2NO+2NC			
	AgSnO ₂ +0.2μmAu			
	AC-15 5A/230V DC-13 5A/24V			
	10A gL/gG (NO) 6A gL/gG (NC)			
数	≤30ms			
	≤15ms			
	≤250ms			
	≤500ms			
境 数	20ms			
	IEC/EN 60947 IEC 61326-3-1			
	IEC/EN 61000-6-2 IEC/EN 61000-6-4			
	250 V AC			
	6000V (1.2/50μs)			
	1500 V AC 1min			
	IEC 60947-1			
	10Hz~55Hz 0.35mm			
	III			


→ 应用示例

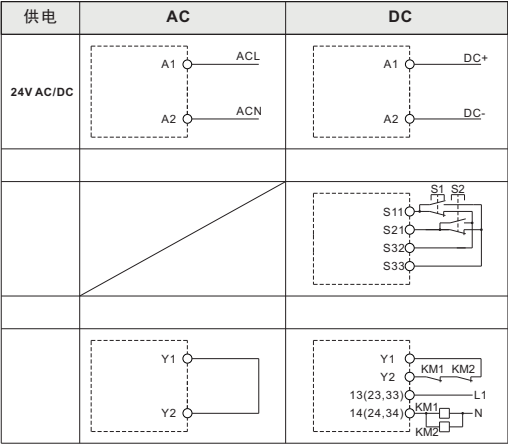

说明

- S1/S2 EN574 type IIIC
- KM1/KM2 IEC 60947

→ 功能描述

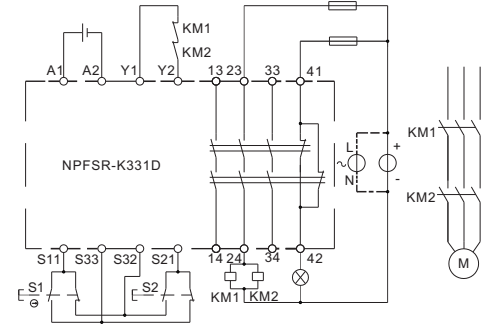

- “ PWR ”
- 0.5s S1 S2
- S1 S2


→ 安装

- DIN IEC 60715 35mm


-

A.


DIN

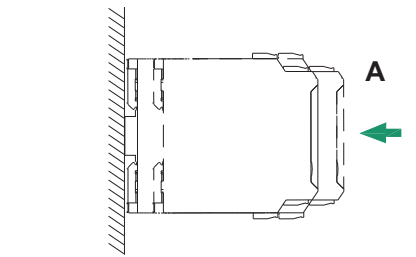


B.



C.



-

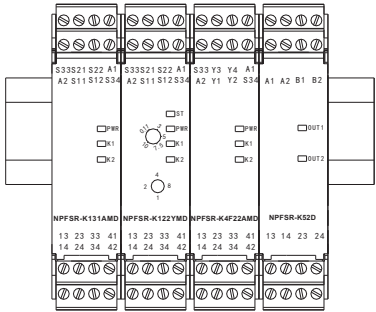

→ 面板显示

- PWR: ()
- K1: K1 () K1
- K2: K2 () K2

→ 注意事项

- IP20 ()

- IEC 60664-1 2

- IEC 61000-4

-

-

→ 补充说明

-